


FUJITEC
www.fujitec.com

FUJITEC

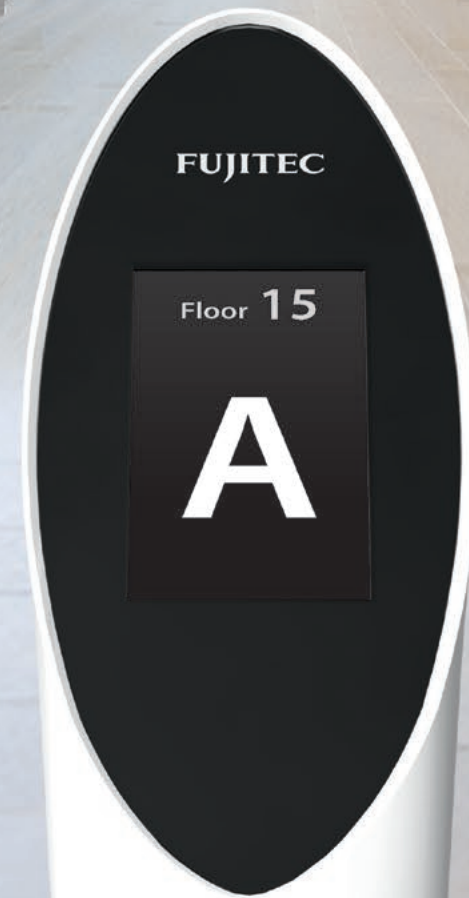

EZSHUTTLE

Destination Floor Guidance System

■ Concept

EZSHUTTLE
Destination Floor Guidance System

As cities are becoming urbanized and building proportions are increasing, reducing passenger crowding and shortening riding time are strongly expected. Fujitec's EZSHUTTLE fulfills these expectations.

EZSHUTTLE optimizes elevator operation control by obtaining passengers' destinations at elevator floors instead of inside the car. This special feature of EZSHUTTLE enables elevator control to provide uncongested elevator service to passengers.

EZSHUTTLE is a new-generation Destination Floor Guidance System.





Speed & Efficiency


Riding Time Reduction by 50%* and Uncongested Elevator Service

During rush hours in urban office buildings, many passengers occupy the lobby in a short period of time and then, rush to the elevators responding to their up / down hall call registrations.

Currently, a fully occupied elevator receives many car call registrations and must stop at many floors in order to complete all passenger service in its traveling direction. This elevator operation process causes a long riding time for passengers.

In an elevator operating system with EZSHUTTLE, passengers are required to register their destinations at the elevator floors rather than conventionally registering them inside the elevator. The EZSHUTTLE system then guides passengers to their assigned elevators, which will have been selected to minimize the number of destination stops based on the registered destinations. This passenger guidance and elevator assignment provides passengers with uncongested elevator service and a reduction in passenger riding time by 50%* at peak travel periods.

* Based on comparisons of passenger riding time obtained under a conventional elevator operating system and that under a simulated EZSHUTTLE-equipped elevator operating system.

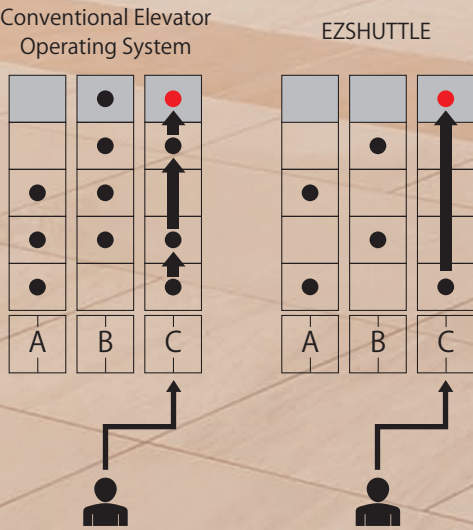

■ Functions




Using EZSHUTTLE

- 1


Upon registration of your destination, your assigned elevator will be indicated on the entry terminal.
- 2

Walk to and wait for the elevator that the entry terminal has assigned for you.

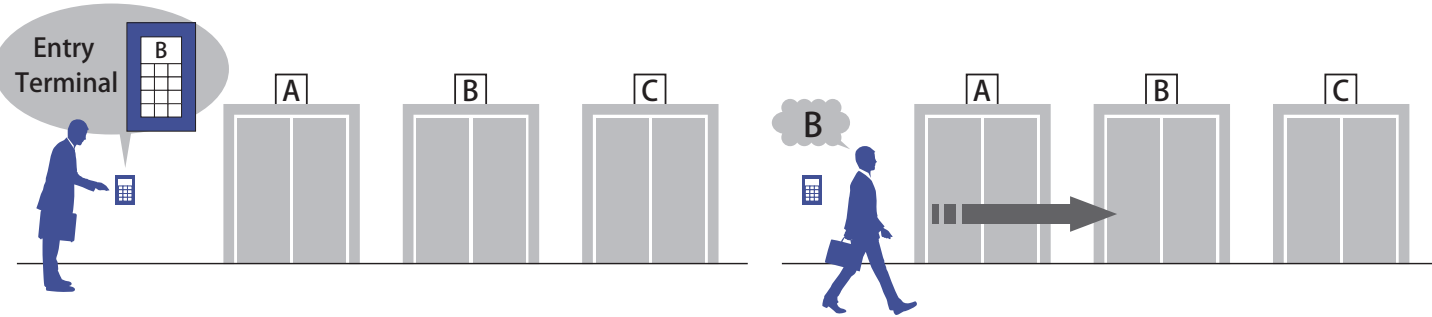

- 3

Make sure that you are waiting for the right elevator by checking the Elevator Indication Panel.

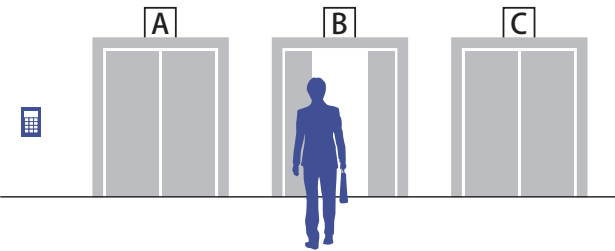


Notes:
While waiting for your assigned elevator, any other early arriving elevator will not be suitable for your destination. You are advised to only take the elevator that the entry terminal had indicated.



Destination Floor Indicator on Car Entrance Column




Elevator Indication Panel

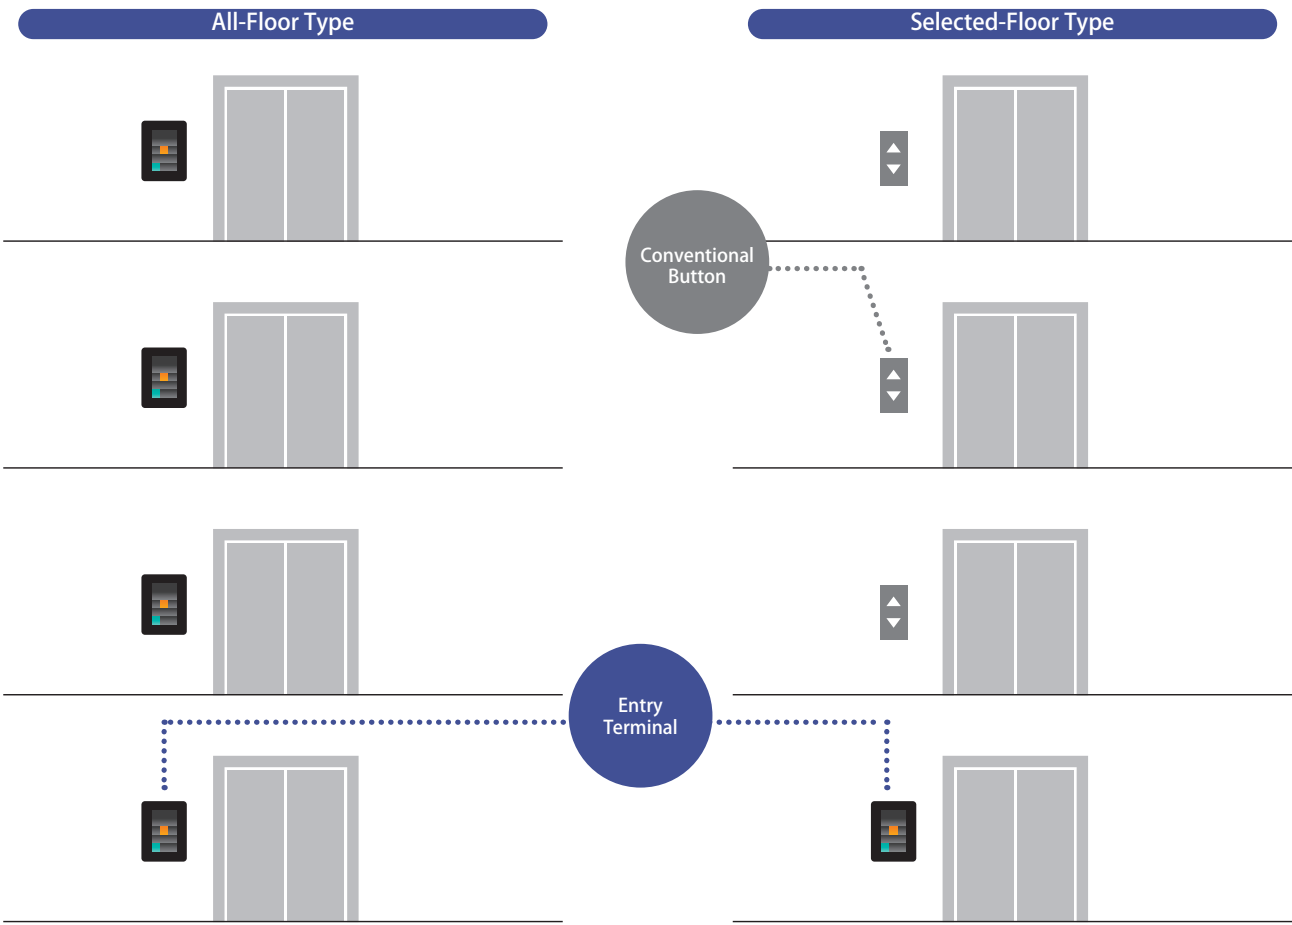


At the customer's request, entry terminals can be installed only at the main floor (or another high-traffic floor); other floors will have conventional up and down hall call buttons. This provision helps increase the efficiency of passenger transportation.

* For EZSHUTTLE All-Floor Type systems, elevator cars have no car operating boards. If a passenger has mistakenly entered the wrong car, the person is required to leave the car at the next destination floor and register his or her destination again at the entry terminal.

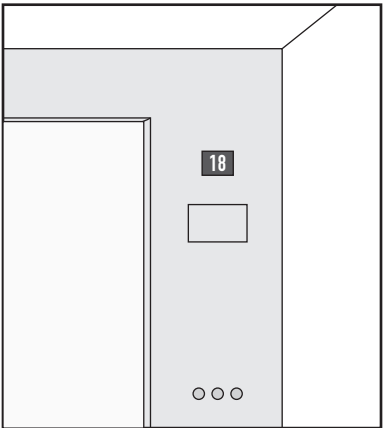

* For EZSHUTTLE Selected-Floor Type systems, elevator cars have car operating boards. However, the registration of a car call can be made only when the elevator has landed at a floor without entry terminals.

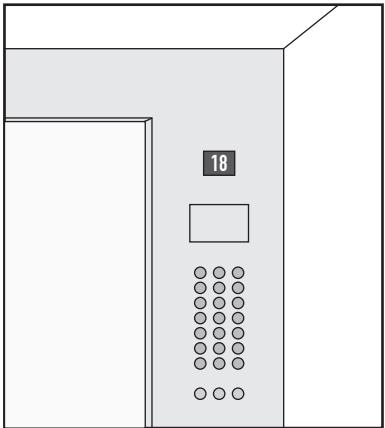


■ Functions

Elevator Operating System with EZSHUTTLE


Before Elevator's Arrival

Passengers wait in front of their assigned elevators as indicated on the entry terminals.

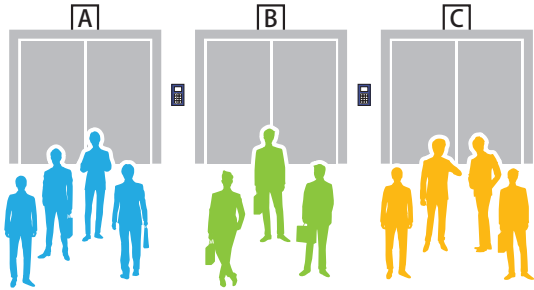

Riding the Elevator

Each group of passengers takes the elevator bound for their zoned destinations.

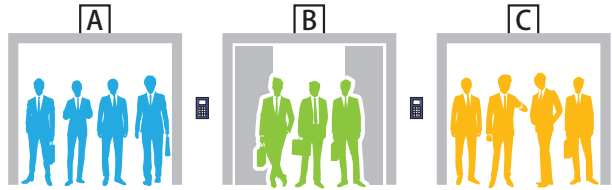

Conventional Elevator Operating System

Before Elevator's Arrival

After registering hall calls, passengers wait in front of the first responding elevator.



Riding the Elevator

Passengers going to different zones ride in the same elevator. Some passengers are left behind by the overcrowded elevator.



■ Predictive Control

- Predictive Control predicts and assesses the waiting and riding time of all passengers. This prediction and assessment will be reflected in the elevator operating system.
- Regarding the waiting time, the predictions and assessments are made based on both already registered destinations and possible future registrations.

■ Energy-Saving Control

- Before an assigned elevator responds to a passenger's registration, this control calculates the elevator's travel distance in the future. The suitable elevator will be automatically selected to make the travel distance shortest and save energy.

■ Minimizing Long Waiting Time

- Assuming that newly registered destinations are applied to the current operation of elevators, all future passenger waiting time will be assessed. Based on this assessment, any future passenger waiting time will be minimized.

■ Traffic Analysis Service

- Over a month or more, elevator traffic data is stored inside a group control panel. As the need arises, it can be checked and analyzed.
- With the use of Fujitec's independently designed simulator, an analysis of the stored data and recommendations will be made by Fujitec for the optimal performance of the elevators. This will be done at the customer's request and at an additional charge.

■ Uncongested Elevator Service


- During the morning rush hours or other up-peak periods, elevators dispatched from the lobby are 30% less congested than conventionally controlled elevators.
- Less congestion allows riding / waiting passengers to smoothly get in /out of elevators at floors.
- In addition, less congestion leads to a decrease in the number of elevator stops, which will reduce riding stress.

■ Decrease of Floor Bypasses

- Based on the number of registered destinations on the entry terminals at each floor, the number of passengers who can ride in the same elevator will be calculated with a high degree of accuracy. Based on this calculated data, elevators bypassing waiting passengers will be reduced to a large degree.

■ Specifications

Synchronization with Building Security Management System

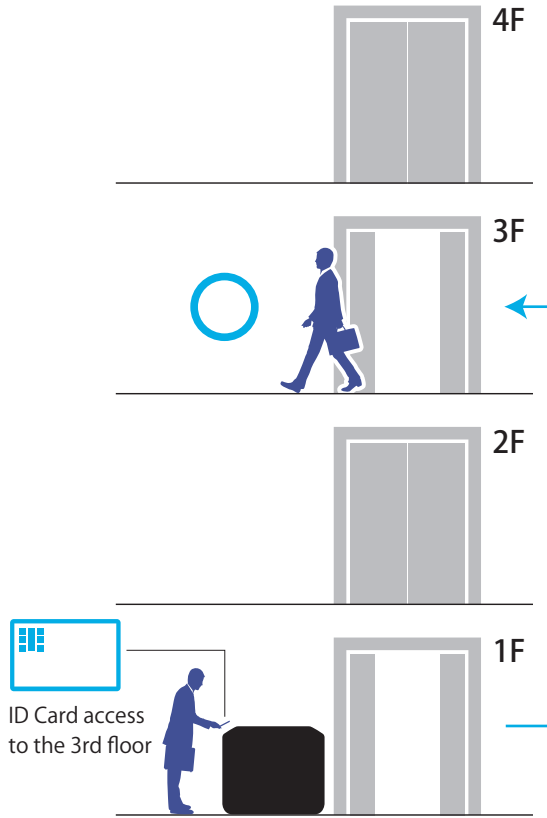

■ Synchronization with Building Security Management System

- EZSHUTTLE can be linked to a building security management system. EZSHUTTLE's passenger ID authentication synchronizes with the building security system and restricts access to specific floors. When a passenger presents their ID card at a security gate equipped with an EZSHUTTLE entry terminal, their destination will be registered automatically both in EZSHUTTLE and the building security system.

■ Universal Design and Functions

- For passengers requiring extra time to get in/off, pressing the wheel-chair-user button will extend elevator operation time; exclusive service will be provided to those in need.
- Audio guidance can be provided by EZSHUTTLE.

■ VIP Operation

- EZSHUTTLE provides VIP exclusive service to those carrying special ID cards. When a special ID card has been used to register a destination, the elevator that can respond the fastest will be assigned. The elevator will take the VIP(s) directly to their destination, while rejecting any incoming hall calls.

■ Prioritized Elevator Operation for Special Floors

- At a pre-determined special floor such as the director's floor, etc., when a passenger has registered a destination floor, EZSHUTTLE promptly assigns an elevator that can respond quickly in order to minimize the wait time at that floor.
- At a regular floor, when a passenger has registered a special floor as their destination, EZSHUTTLE promptly assigns an elevator that can transport them to that floor as fast as possible.

■ Flexible Building Layout

- Customers and architects can freely plan elevator-served floors in buildings, because they don't need to connect elevator-served floors in the same service zone and are not constrained by the building's structure and allocation of public floors. Therefore, no transit floors are required.
- No connection of elevator-served floors increases rentable space in buildings. The reduction of extra parts and labor for elevator hoistway installation results in a reduction of building construction costs.

List of Specifications

● : Standard Specifications ■ : Optional Specifications (with additional charge) — : Not Available

System Functions	All-Floor Type	Selected-Floor Type
Predictive Control	●	— *1
Energy-Saving Control	●	—
Minimizing Long Waiting Time	●	—
Traffic Analysis Service	● *2	● *2
Uncongested Elevator Service	●	●
Decrease of Floor Bypasses	●	—
Synchronization with Building Security Management System	■	■
Universal Design & Functions	■	■
VIP Operation	■	■
Prioritized Elevator Operation for Special Floors	■	—
Flexible Building Layout	■	—

Fixtures		All-Floor Type	Selected-Floor Type
Entry Terminals		● *3	● *3
Destination Floor	On Car-Side Entrance Column	● *4	● *4
	Floors	■ *4	■ *4
Hall Lanterns	Typical Floors	■	● *5
	Main Floor	■	■
Destination Buttons inside Car		— *6	●
Elevator Indication Panel		●	●

- *1 Predictive control is made by the corresponding group control system.
- *2 Traffic analysis service is made at the customer's request and at an additional charge.
- *3 The wheel-chair-user buttons will be provided at an additional charge.
- *4 Destination Floor Indicator can be chosen from Faceplate Type (standard) and Built-in Type (optn).
- *5 Hall lanterns will not be provided at the floors with entry terminals.
- *6 Destination (Registration) buttons are concealed inside the cabinet of a car operating board.



AP

The elegant and organic form accentuates a building floor.



EP

The slim appearance of this form consisting of multiple semi-translucent surfaces builds a sense of openness.



DP

The curved form provides a comfortable feeling and creates a calm atmosphere.



FP

The Origami (Japanese Paper Folding) - shaped motif has a silent presence and creates a high-quality mood.

	AP	EP	DP, FP
Faceplate		Acrylic (non-glare finish) Black Metallic	
Body	Painted FRP	Painted Steel and Translucent Smoke Grey Acrylic Panel	Painted Steel

■ **Fixture Design** — Wall Mounted Model —

EW



With Card Reader



With Card Reader & ADA Button / Speaker




With Card Reader & ADA Button / Speaker

EW	
Faceplate	Acrylic (non-glare finish) Black Metallic
Body	—

DW



With Card Reader

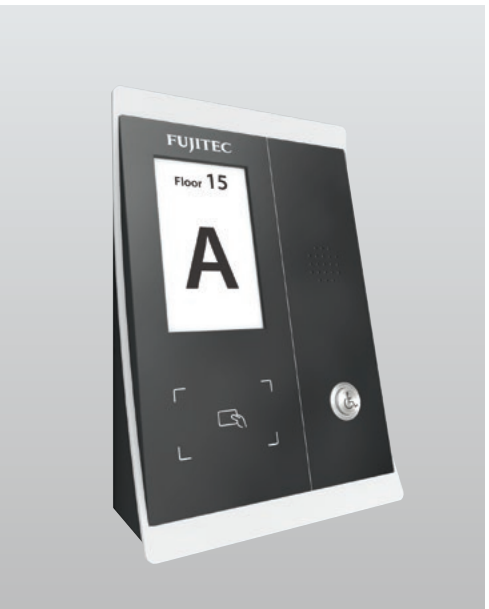

With Card Reader & ADA Button / Speaker

DW	
Faceplate	Acrylic (non-glare finish) Black Metallic
Body	Acrylic Pearl White & Black Metallic

FW



With Card Reader



With Card Reader & ADA Button / Speaker

FW	
Faceplate	Acrylic (non-glare finish) Black Metallic
Body	Acrylic Silver Metallic

■ Fixture Design — Others —

Destination Floor Indicator
on Car Entrance Column



Without Faceplate



With Faceplate

Elevator Indication Panel



PW
Entry Terminal with Push Buttons

PW	
Faceplate	Hairline Stainless Steel
Body	—



■ Work by Others

Construction Work

- 1. Cutouts and holes for installation of Entry Terminals.
- 2. Retouching and finishing work of the areas adjacent to Entry Terminals after installation.

Electrical Work

- 1. Conduits from Entry Terminals to the elevator hoistway.
- 2. Provide electric power for the installation and adjustment work.
- 3. Provide card reader system, its power supply, wiring and conduits if required.
- 4. Provide security gates and inner wiring works if required.
- 5. Conduits and wiring from security gates to the elevator hoistway if required.

The product images shown are for illustration purpose and may not be exact representation of the actual products.

FUJITEC

EZSHUTTLE

Destination Floor Guidance System

A

↑
A
1234567890-.



Destination Floor Registration Unit



Silver Body

GW Type	
Faceplate	LCD Area: Tempered Glass Card Reader Area: Black Color
Body	Resin Silver/Black/Rosy Gold Color
Overall Size (W x H x D)	130 x 420 x 160 mm
Card Reader	With/Without *
Handicap Button	With/Without *

* The size of the body is unchanged by this option.



Black Body



Rosy Gold Body

Destination Floor Indicator



Orange LED

16 Segments LED	
Faceplate	with: Hairline Finished Stainless Steel without (Entrance column integrated)
Display	Black Smoke Resin
Display Size (W x H)	50 x 340 mm
LED Color	Orange/White



White LED

Elevator Indication Panel



Orange Lantern



Flag Type	
Panel	Sandblast Finished Stainless Steel
Panel Size (W x H x T)	250 x 250 x 20 mm
Lantern	With (Orange/White)/Without



White Lantern



Without Lantern

Plate Type	
Plate	Resin Silver Color
Plate Size (W x H)	200 x 200 x 2 mm